



# GP Fan Control

Last Changed: 24/08/2021

**Note:** The Optional Diodes can be added when interference is detected. The 1A will be required when interference comes when the fan is switched off. The 6A is required when the fan makes continuous interference while it is running. Make sure the stripe of the Diode is connected on the positive side.

## Negative Drivers from ECU

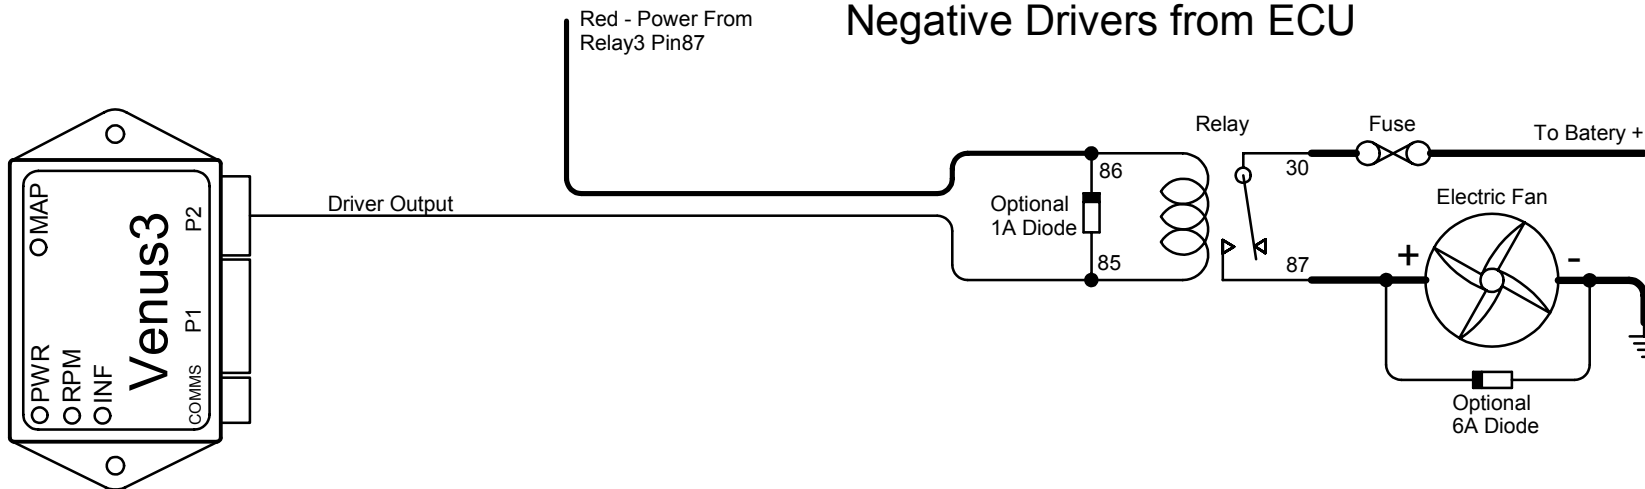

- |                 |                   |
|-----------------|-------------------|
| 1. Black/Purple | - Coil Negative 1 |
| 2. Black/Orange | - Coil Negative 3 |
| 3. Black/White  | - Coil Negative 5 |
| 4. Blue         | - Relay Negative  |
| 5. Blue/Orange  | - GP Negative 1   |
| 6. Black/Red    | - Coil Negative 2 |
| 7. Black/Brown  | - Coil Negative 4 |
| 8. Black/Yellow | - Coil Negative 6 |
| 9. Green        | - GP Negative 3   |
| 10. Blue/White  | - GP Negative 2   |

Connector Pinouts

### General Purpose Outputs

Output Selected Output 1

Driver Output **GP Output 1**

### Output Settings

Water Temperature

Min 93 (°C)

Max 98 (°C)