


Mercury3 Bootloader Recovery Software

The Mercury3 has a bootloader, meaning firmware can be loaded via software without requiring the Firmware Programmer, as was necessary with the Mercury2. However, if the firmware upload process is interrupted, the device may lock, and the software will not connect. In such cases, you need the Spitronics Recovery software to install a starter program, allowing you to reload the firmware.

First, close all Spitronics or other product software to free the communication port (Comm Port). Open the [Spitronics Recovery Ver1.0.3 Software](#). If it's not installed yet, unzip it on the desktop or in your Spitronics folder on the C: drive.


To manually put the Mercury3 in Program mode, connect only the P1 connector to the device. **Do not switch the power on yet**, and avoid connecting the communication cable at this stage. Create a jumper wire and short **Pin 1 (GRN1)** and **Pin 3 (GND)** on the communication connector. Refer to the provided diagram and picture to ensure you have the correct pins, as incorrect connections may damage the product, for which you will be responsible.

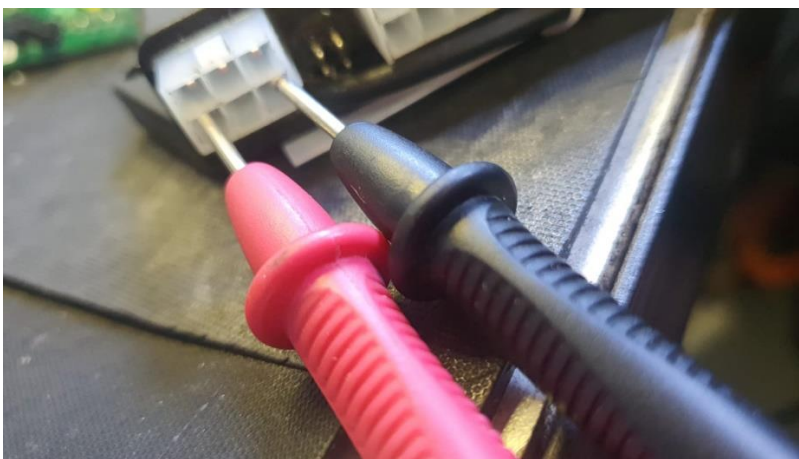


6 WAY	
GRN1	P5-1
TXD	P5-2
GND	P5-3
	P5-4
RXD	P5-5
VCC	P5-6

Once the jumper is in place, switch the power on. The **Green1 LED** will light up. Now, remove the jumper from the communication connector. The **Green1 LED** will turn off, indicating that the Mercury3 is now in Program mode.


Next, open the Spitronics Recovery software. The startup screen will look like this one below:

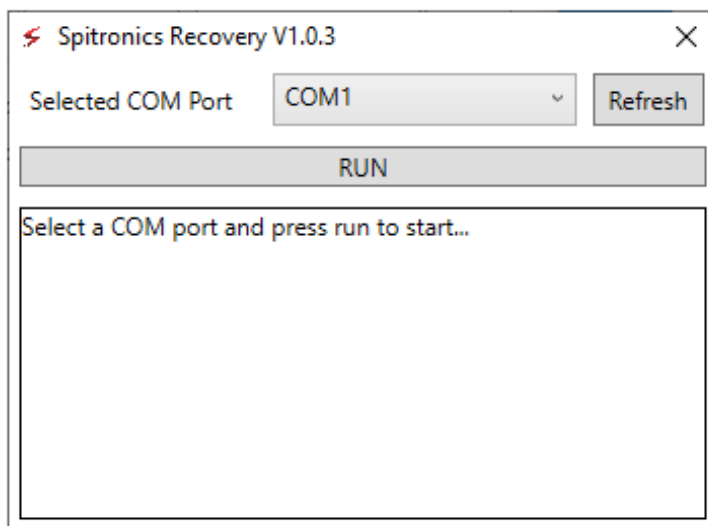


Click on the **Select COM Port** button.

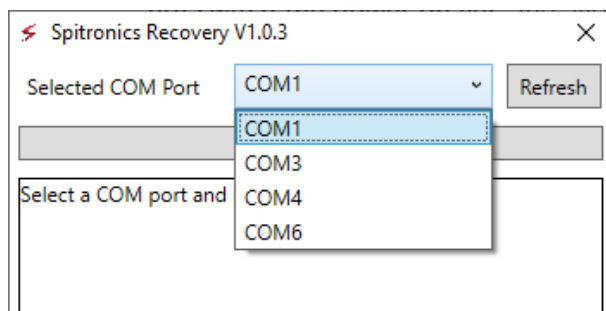


Enter the **Comm Port number** your software usually uses. If you're unsure, try selecting each port one by one and click **RUN**. If other software is open, the port may not appear in the list.

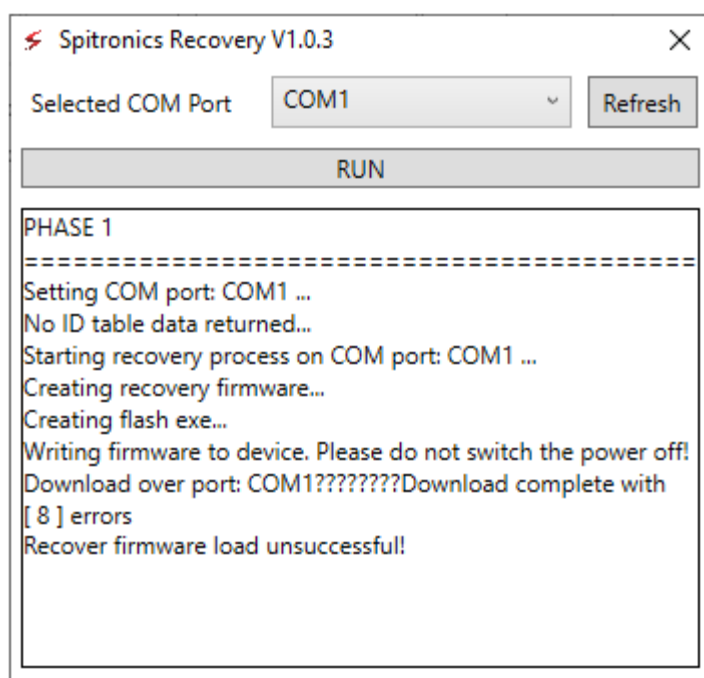


If the incorrect Comm Port is selected, the message will look like this: "???" in the string, indicating no response from the device. However, if the correct port is chosen, you'll see "@@@" in the message, confirming the communication was successful. The **Firmware select block** will now open, allowing you to load the **X_Test Firmware version 4.0**. This will enable you to open **Hyperspace Device Manager 4.0**, from which you can install the correct firmware.

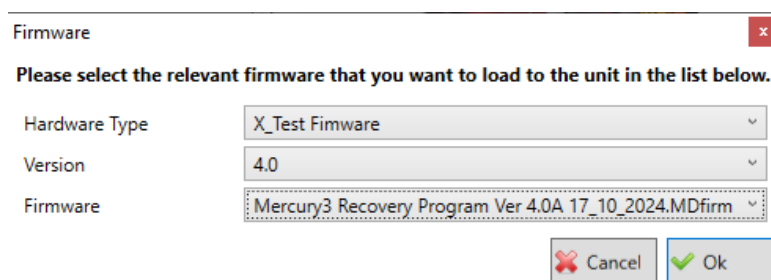

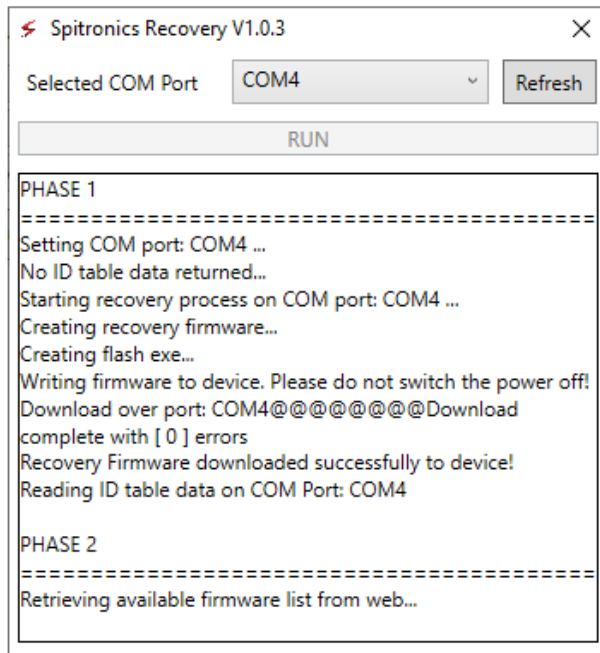

Select the **Mercury3 Recovery Program Ver 4.0A 17_10_2024.MDfirm** and click **OK**. If the message shows "===" again, the programming was successful. This firmware will not pulse any outputs so it is safe to use in a car. Only the 4 LED's on the mercury will flash indicating the firmware loaded successfully.

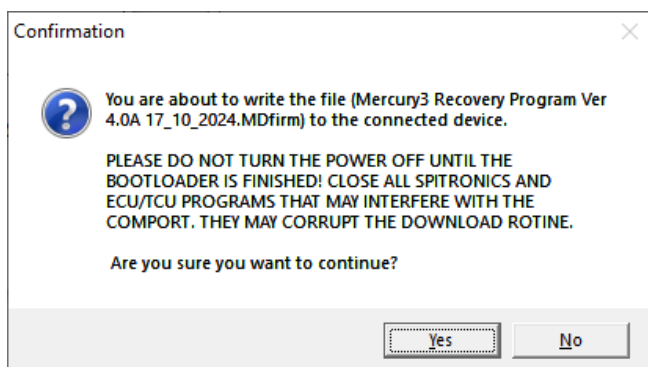

Click **Yes**.

