


2Rotor Full Seq COP Basic Coils

Last Changed: 29/04/2024
Preferred Harness: E41
Other Harnesses: E31,E40

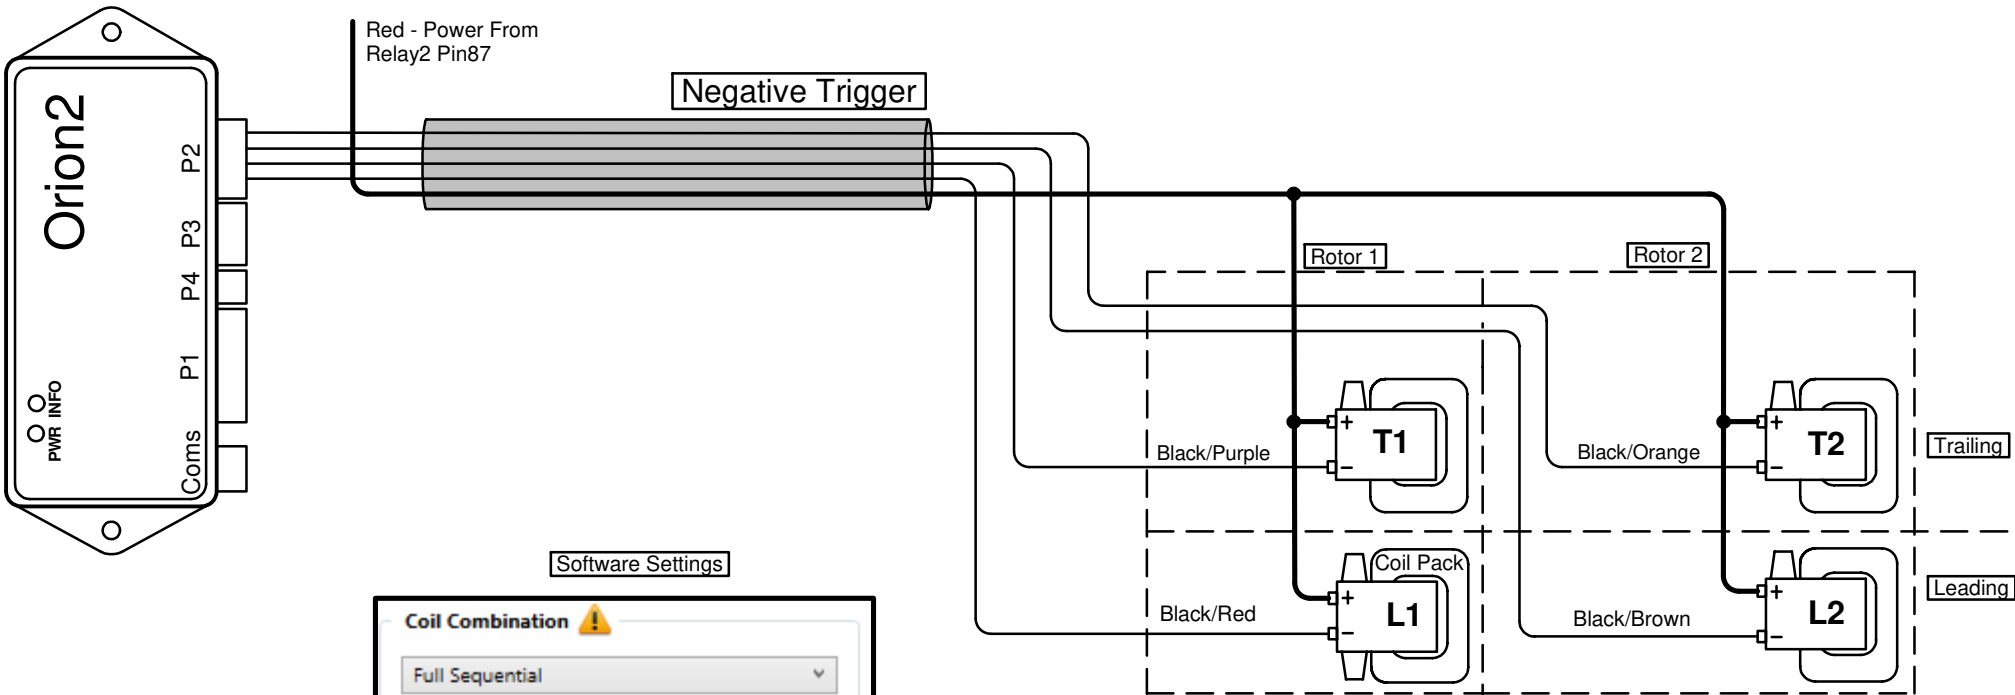

P2

6	7	8	9	10
1	2	3	4	5

Harness Pin View

1. Black/Purple	- Coil Negative 2 T1
2. Black/Orange	- Coil Negative 4 T2
3. Black/White	-
4. Blue	-
5. Blue/Orange	-
6. Black/Red	- Coil Negative 1 L1
7. Black/Brown	- Coil Negative 3 L2
8. Black/Yellow	-
9. Green	-
10. Blue/White	-

Connector Pinouts

Software Settings

Coil Combination ⚠

Full Sequential ▾

Coil Driver Trigger Combination ⚠

Basic Coil – Use Coil Negative Drivers ▾

Coil Driver Outputs

Coil Driver Output 1 Coil Negative 1

Coil Driver Output 2 Coil Negative 2

Coil Driver Output 3 Coil Negative 3

Coil Driver Output 4 Coil Negative 4